

PEPWAVE MAX HD1 Dome 5G

Single 5G Cellular Router for Mobile Outdoor Deployments

MSRP: \$2799



Minimal Cable Loss, Optimize Cellular Signal Quality

Most outdoor deployments require a centrally placed router attached to strategically placed antennas. With its integrated antennas, the HD1 Dome 5G minimizes cable loss and gives you the best possible signal.



Scalable Deployment, Easy Management

Connect multiple MAX HD1 Dome 5Gs to a SpeedFusion enabled router via PoE for as much bandwidth as you want. Using Peplink's SpeedFusion technology, a mega-bandwidth channel can provide you with the fastest and most reliable internet connection anytime, anywhere.




Robust Design, Super-Duty IP67 Enclosure

The MAX HD1 Dome 5G has an IP67 rated enclosure and certifications of protection against water, dust, vibration, and inclement weather.



For More Information, Contact:

PEPWAVE MAX HD1 Dome 5G

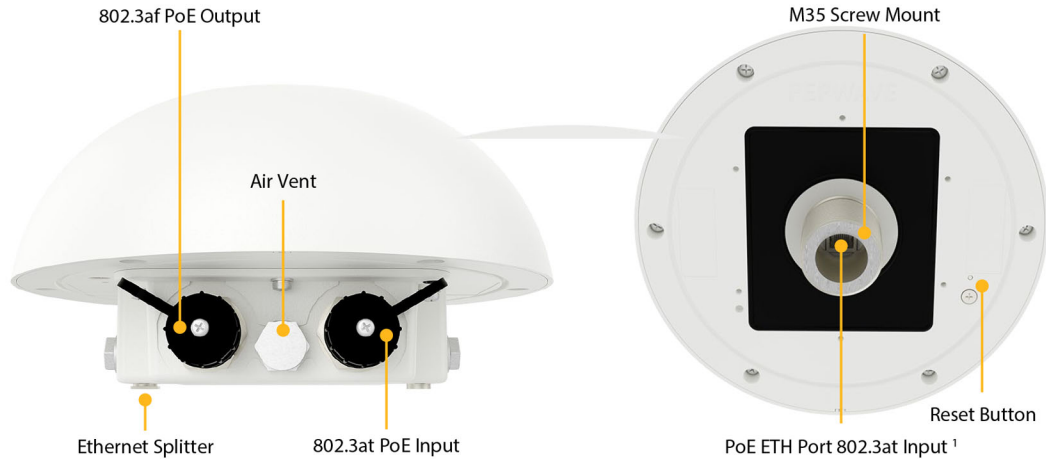

Specifications

WAN Interface	1x 5G Modem with Redundant SIM Slots ²	Dimensions	4.33 inches (radius) x 4.53 inches (height) 110mm (radius) x 115mm (height)
LAN Interface	1x 10/100/1000M Ethernet ³	Weight	With Ethernet Splitter: 3.75 pounds / 1.7 kg Without Ethernet Splitter: 2.65 pounds / 1.2kg
Number of PepVPN	2	Operating Temperature	-40 - 149 °F / -40 - 65 °C
Enclosure	Rugged outdoor IP67 (with Ethernet Splitter)	Humidity	15% - 95% (non-condensing)
Recommend Users	150	Warranty	1-Year Limited Warranty
Cellular Data Rate (Downlink / Uplink)	5G: 4 Gbps / 700 Mbps LTE CAT-20: 2 Gbps / 150 Mbps	Certifications	FCC, CE, RoHS, Electromagnetic Compatibility EN61000
Antennas	4X4 Internal MIMO Cellular Antennas 1x Internal GPS Antenna	Package Contents	MAX HD1 Dome 5G, Ethernet Splitter, 2x Waterproof Ethernet Connector (ACW-112), Mounting Kit Set
Power Input	1x 802.3at PoE+		
Power Output	1x 802.3af PoE (with Ethernet Splitter)		
Power Consumption	20W (max., without PoE output)		

¹ With Ethernet Splitter, Ethernet LAN port can be split into two LAN ports.

² SIM Injector is available separately.

³ Ethernet LAN port can be split into two LAN ports using the included splitter (1x LAN 802.3af PoE output, 1x LAN 802.3at PoE+ in).

Ordering Information - MAX HD1 Dome 5G

Product Code	Regions	5G Bands	LTE Bands
MAX-HD1-DOM-M-5GD Embedded Modem(s): 1x 5G	Primary: APAC, EMEA Compatibility: Global	5G (NSA) Sub 6Ghz: n1, n2, n3, n5, n7, n8, n12, n20, n28, n38, n41, n66, n71, n77, n78, n79	B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29, B30, B32, B34, B38, B39, B40, B41, B42, B46, B48, B66, B71

PEPWAVE SIM Injector

More SIMs, More Range

Supports up to 8x SIM Cards

Use the SIM Injector to add another 8 SIM cards to your deployment, giving you the ability to connect to multiple carriers and ensuring a stable connection.




Extend up to 100m

In addition to adding SIM capacity, the SIM Injector also adds 100 meters of flexibility between the router and the SIM cards, enabling you to place the cellular router anywhere you want without worrying about changing SIM cards.

Specifications

SIM Slots	8x Active SIM Slots, Standard Size
LAN Interface	4x GE, PoE 802.3at Support
Power Input	DC Jack / Terminal Block: 12-56V
Dimensions	1.6 x 5.8 x 5 inches 40 x 147 x 128 mm
Weight	430 grams 0.94 pounds
Operating Temperature	-40 - 149 °F / -40 - 65 °C
Humidity	15% - 95% (non-condensing)

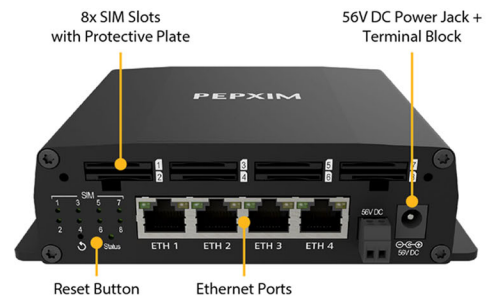


Ordering Information - SIM Injector

Product Code	Description
SIM-BK8-4E-56V	SIM Injector, 8x SIM cards capacity, 4x 10/100/1000 LAN ports, 56V DC
SIM-BK8-4E-56V-DOM	SIM Injector (bundle offer), 8x SIM cards capacity, 4x 10/100/1000 LAN ports, 56V DC


PEPWAVE MAX HD1 Dome 5G Mounting Options

Ethernet Splitter & Mounting Bracket


The HD1 Dome comes with an Ethernet splitter that enables an additional GE LAN output. With the splitter installed, the HD1 Dome 5G can then be used with the included pole mounting bracket to fix onto any wall, or to securely tie onto any pole.

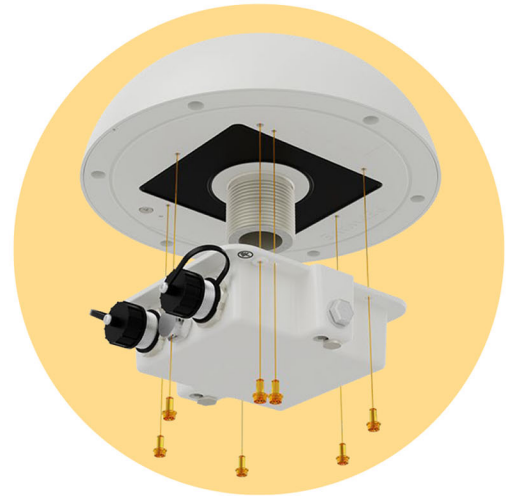


Ethernet Splitter

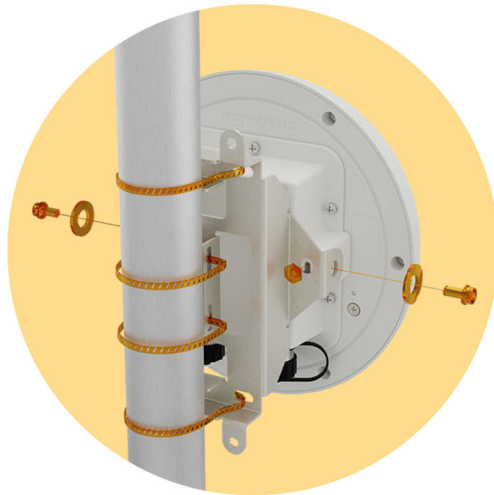

Pole Mounting

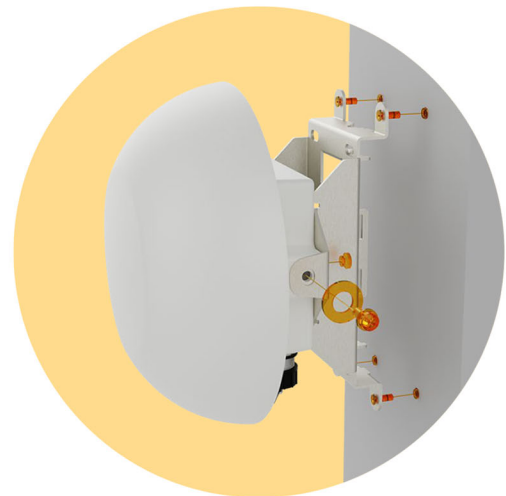

Wall Mounting

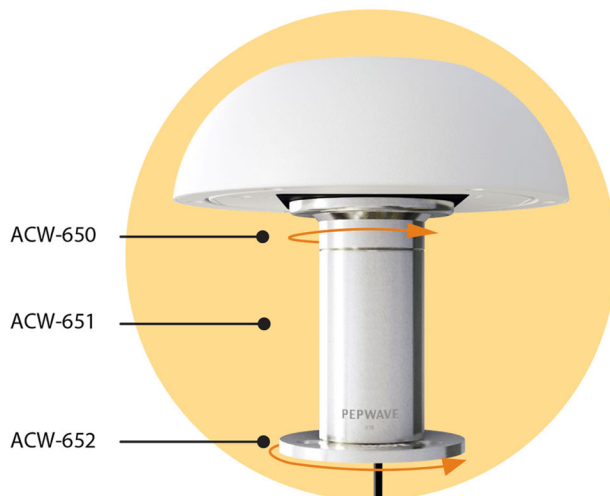

Premium Deck Mount

Rugged and heavy duty mounts are intended for deck and mast installations. The cable is protected inside the mount with direct feed through the deck or mast.

*Premium Deck Mount sold separately

PEPWAVE


MAX HD1 Dome 5G

Event / Remote Site Application

Connect multiple MAX HD1 Dome 5G routers to the SDX Pro for as much bandwidth as you want. Using Peplink's SpeedFusion technology, a mega-bandwidth channel can provide you with the fastest and most reliable internet connection anytime, anywhere.

MAX HD1 Dome 5G

Multiple IP67 rated MAX HD1 Dome 5G routers are able to receive cellular signals and deliver them to an SDX Pro without loss.

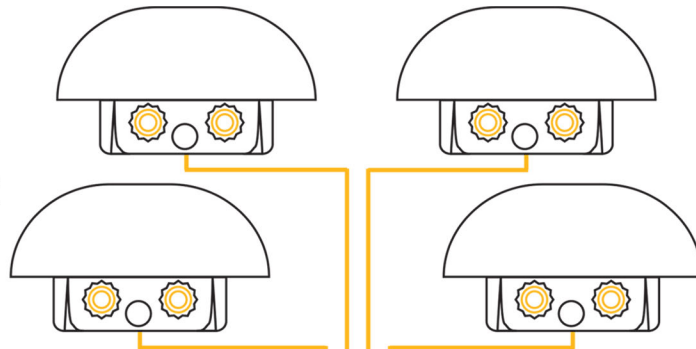


SDX Pro

Modular powerhouse router to power up the Domes and bond cellular connections together.

Remote Site



Headquarter



SIM Injector

SIM Injectors allow for the easy and quick swapping of SIM cards, simplifying SIM management.

SpeedFusion


Bandwidth Bonding combines the bandwidth of multiple Domes into a single mega-bandwidth channel that is ready and capable of handling any use.

PEPWAVE MAX HD1 Dome 5G Maritime (Small Yacht) Application

The MAX HD1 Dome 5G's robust design allows for reliable connectivity in different circumstances and can withstand inclement weather at sea. Capable of being deployed up to 100m away, the MAX HD1 Dome 5G can be placed conveniently to provide high bandwidth to the whole network. Add a SIM Injector to make SIM swapping and management quick and easy.

MAX HD1 Dome 5G

An IP67 rated MAX HD1 Dome 5G with various certifications and a robust design is capable of providing reliable connectivity at sea.

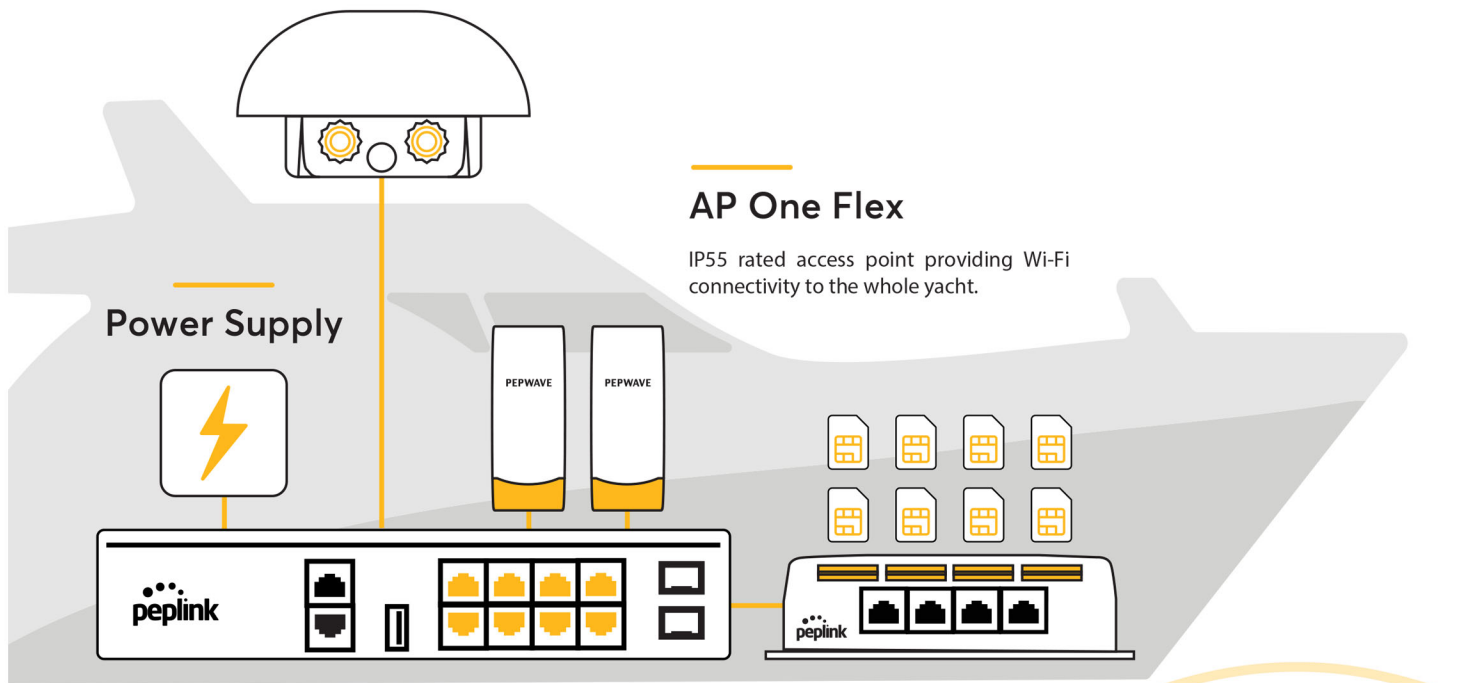

Power Supply



AP One Flex

IP55 rated access point providing Wi-Fi connectivity to the whole yacht.

SD Switch 8-Port Rugged

Connecting the whole network while powering up other network components.

SIM Injector

Allows for easy and quick swapping of SIM cards according to the available connections of different SIM profiles at sea.